

400Gb/s QSFP-DD SR8 Transceiver

QSFP-DD-400G-SR8

Features

- 8 channels full-duplex transceiver modules
- Transmission data rate up to 53Gbps per channel
- 8x53Gbps PAM4 transmitter and PAM4 receiver
- 8 channels 850nm VCSEL array
- 8 channels PIN photo detector array
- Internal CDR circuits on both receiver and transmitter channels
- Power consumption <8.5W
- Hot Pluggable QSFP DD form factor and Compliant with CMIS
- Maximum link length of 70m on OM3 Multimode Fiber MMF and 100m on OM4 MMF with FEC
- MPO16 connector receptacle
- Built-in digital diagnostic functions
- Operating case temperature 0°C to +70°C
- 3.3V power supply voltage

Applications

- Data centers and Cloud Networks
- 400GE Interconnect Requirements.

Description

The 400G QSFP-DD SR8 Transceiver is designed to transmit and receive serial optical data links up to 8 x 53.125Gbps data rate by PAM4 modulation format over multi-mode fiber.

Absolute Maximum Ratings

| Parameter | Symbol | Min | Max | Unit |
|----------------------------|--------|------|---------|------|
| Supply Voltage | Vcc | -0.3 | 3.6 | V |
| Input Voltage | Vin | -0.3 | Vcc+0.3 | V |
| Storage Temperature | Tst | -20 | 85 | °C |
| Case Operating Temperature | Top | 0 | 70 | °C |
| Humidity(non-condensing) | Rh | 5 | 95 | % |

Recommended Operating Conditions

| Parameter | Symbol | Min | Typical | Max | Unit |
|----------------------------|--------|------|---------|------|------|
| Supply Voltage | Vcc | 3.13 | 3.3 | 3.47 | V |
| Operating Case temperature | Tca | 0 | | 70 | °C |
| Data Rate Per Lane | fd | | 26.5625 | | GBd |
| Humidity | Rh | 5 | | 85 | % |
| Power Dissipation | Pm | | 7.8 | 8.5 | W |

Electrical Specifications

| Parameter | Symbol | Min | Typical | Max | Unit |
|---|------------------|-------|---------|--------|-------|
| Differential input impedance | Zin | 90 | 100 | 110 | ohm |
| Differential Output impedance | Zout | 90 | 100 | 110 | ohm |
| Differential input voltage amplitude aAmplitude | ΔV_{in} | | | 1000 | mVp-p |
| Differential output voltage amplitude | ΔV_{out} | | | 900 | mVp-p |
| Skew | Sw | | | 300 | ps |
| Bit Error Rate | BER | | | 2.4E-4 | |
| Near-end Eye Width at 10 ⁻⁶ probability(EW6) | | 0.265 | | | UI |
| Near-end Eye Height at 10 ⁻⁶ probability(EH6) | | 70 | | | mV |
| Far-end Eye Width at 10 ⁻⁶ probability(EW6) | | 0.20 | | | UI |
| Far-end Eye Height at 10 ⁻⁶ probability(EH6) | | 30 | | | mV |
| Near-end Eye Linearity | | 0.85 | | | |

Note:

1. BER=2.4E-4; PRBS31Q@26.5625GBd. Pre-FEC
2. Differential input voltage amplitude is measured between TxnP and TxnN.
3. Differential output voltage amplitude is measured between RxnP and RxnN.

Optical Characteristics

| Parameter | Symbol | Min | Typical | Max | Unit | Notes |
|---|-----------------|------|---------|-----|------|-------|
| Transmitter | | | | | | |
| Centre Wavelength | λ_c | 840 | 850 | 860 | nm | |
| RMS spectral width | $\Delta\lambda$ | | | 0.6 | nm | |
| Average launch power, each lane | Pout | -6.5 | | 4 | dBm | |
| Optical Modulation Amplitude (OMAouter), each lane | OMA | -4.5 | | 3 | dBm | |
| Transmitter and dispersion eye closure(TDEC),each lane | TDEC | | | 4.5 | dB | |

| | | | | | | |
|--|-------------|------|-----|------|-----|---|
| Extinction Ratio | ER | 3 | | | dB | |
| Average launch power of OFF transmitter, each lane | | | | -30 | dB | |
| Receiver | | | | | | |
| Centre Wavelength | λ_c | 840 | 850 | 860 | nm | |
| Receiver Sensitivity in OMAout | RXsen | | | -6.5 | dBm | 1 |
| Stressed Receiver Sensitivity in OMAout | | | | -3 | dBm | 1 |
| Maximum Average power at receiver , each lane input, each lane | | | | 4 | dBm | |
| Minimum Average power at receiver , each lane | | -7.9 | | | dBm | |
| Receiver Reflectance | | | | -12 | dB | |
| LOS Assert | | | | -10 | dBm | |
| LOS De-Assert | | | | -8.5 | dBm | |
| LOS Hysteresis | | 0.5 | | | dB | |

Note:


1. Measured with conformance test signal at TP3 for BER = 2.4E-4 Pre-FEC

Pin Description

| Pin # | Logic | Symbol | Definition |
|-------|-------------|---------|-------------------------------------|
| 1 | | GND | Ground |
| 2 | CML-I | Tx2n | Transmitter Inverted Data Input |
| 3 | CML-I | Tx2p | Transmitter Non-inverted Data Input |
| 4 | | GND | Ground |
| 5 | CML-I | Tx4n | Transmitter Inverted Data Input |
| 6 | CML-I | Tx4p | Transmitter Non-inverted Data Input |
| 7 | | GND | Ground |
| 8 | LVTTL-I | ModSelL | Module Select |
| 9 | LVTTL-I | ResetL | Module Reset |
| 10 | | VccRx | +3.3V Power Supply Receiver |
| 11 | LVC MOS-I/O | SCL | 2-wire serial interface clock |
| 12 | LVC MOS-I/O | SDA | 2-wire serial interface data |
| 13 | | GND | Ground |
| 14 | CML-O | Rx3p | Receiver Non-inverted Data Output |
| 15 | CML-O | Rx3n | Receiver Inverted Data Output |
| 16 | | GND | Ground |
| 17 | CML-O | Rx1p | Receiver Non-inverted Data Output |
| 18 | CML-O | Rx1n | Receiver Inverted Data Output |
| 19 | | GND | Ground |
| 20 | | GND | Ground |
| 21 | CML-O | Rx2n | Receiver Inverted Data Output |
| 22 | CML-O | Rx2p | Receiver Non-inverted Data Output |


| | | | |
|----|----------|----------|-------------------------------------|
| 23 | | GND | Ground |
| 24 | CML-O | Rx4n | Receiver Inverted Data Output |
| 25 | CML-O | Rx4p | Receiver Non-inverted Data Output |
| 26 | | GND | Ground |
| 27 | LVTTTL-O | ModPrsL | Module Present |
| 28 | LVTTTL-O | IntL | Interrupt |
| 29 | | VccTx | +3.3V Power Supply Transmitter |
| 30 | | Vcc1 | +3.3V Power Supply |
| 31 | LVTTTL-I | InitMode | Initialization mode |
| 32 | | GND | Ground |
| 33 | CML-I | Tx3p | Transmitter Non-inverted Data Input |
| 34 | CML-I | Tx3n | Transmitter Inverted Data Input |
| 35 | | GND | Ground |
| 36 | CML-I | Tx1p | Transmitter Non-inverted Data Input |
| 37 | CML-I | Tx1n | Transmitter Inverted Data Input |
| 38 | | GND | Ground |
| 39 | | GND | Ground |
| 40 | CML-I | Tx6n | Transmitter Inverted Data Input |
| 41 | CML-I | Tx6p | Transmitter Non-inverted Data Input |
| 42 | | GND | Ground |
| 43 | CML-I | Tx8n | Transmitter Inverted Data Input |
| 44 | CML-I | Tx8p | Transmitter Non-inverted Data Input |
| 45 | | GND | Ground |
| 46 | | Reserved | |
| 47 | | VS1 | Module Vendor Specific 1 |
| 48 | | VccRx1 | 3.3V Power Supply |
| 49 | | VS2 | Module Vendor Specific 2 |
| 50 | | VS3 | Module Vendor Specific 3 |
| 51 | | GND | Ground |
| 52 | CML-O | Rx7p | Receiver Non-inverted Data Output |
| 53 | CML-O | Rx7n | Receiver Inverted Data Output |
| 54 | | GND | Ground |
| 55 | CML-O | Rx5p | Receiver Non-inverted Data Output |
| 56 | CML-O | Rx5n | Receiver Inverted Data Output |
| 57 | | GND | Ground |
| 58 | | GND | Ground |
| 59 | CML-O | Rx6n | Receiver Inverted Data Output |
| 60 | CML-O | Rx6p | Receiver Non-inverted Data Output |
| 61 | | GND | Ground |
| 62 | CML-O | Rx8n | Receiver Inverted Data Output |
| 63 | CML-O | Rx8p | Receiver Non-inverted Data Output |
| 64 | | GND | Ground |
| 65 | | NC | Not connected |
| 66 | | Reserved | |
| 67 | | VccTx1 | 3.3V Power Supply |
| 68 | | Vcc2 | 3.3V Power Supply |
| 69 | | Reserved | |

| | | | |
|----|-------|------|-------------------------------------|
| 70 | | GND | Ground |
| 71 | CML-I | Tx7p | Transmitter Non-inverted Data Input |
| 72 | CML-I | Tx7n | Transmitter Inverted Data Input |
| 73 | | GND | Ground |
| 74 | CML-I | Tx5p | Transmitter Non-inverted Data Input |
| 75 | CML-I | Tx5n | Transmitter Inverted Data Input |
| 76 | | GND | Ground |

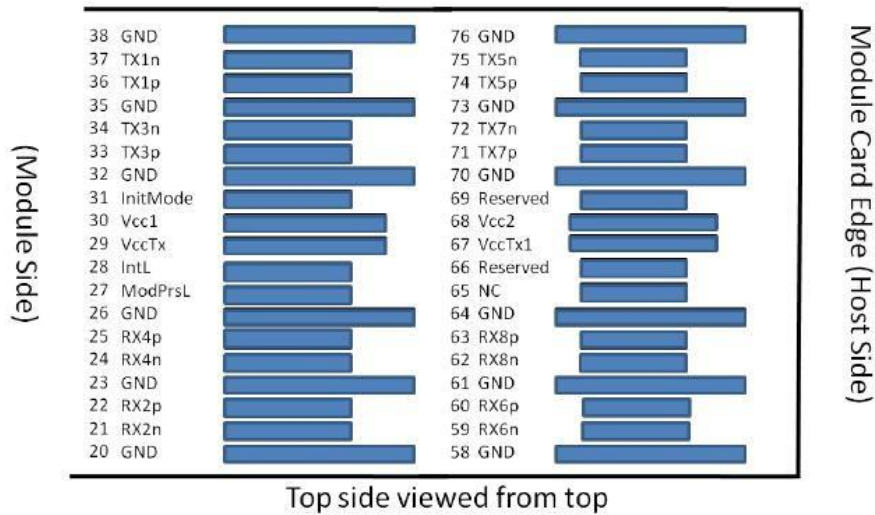

Legacy QSFP28 Pads


Additional QSFP-DD Pads

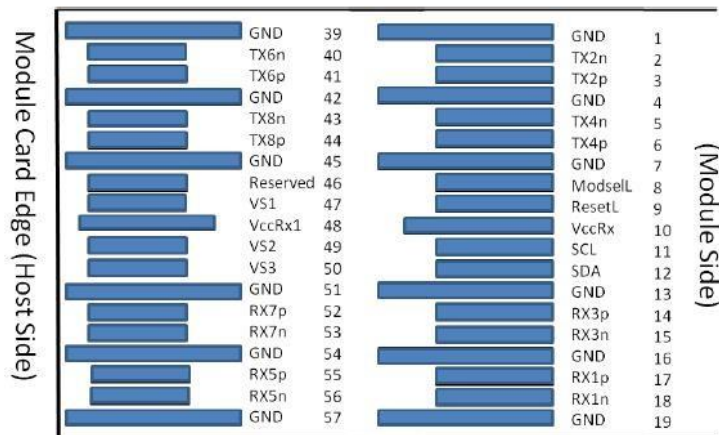

Additional QSFP-DD Pads

Legacy QSFP28 Pads

Optical interface

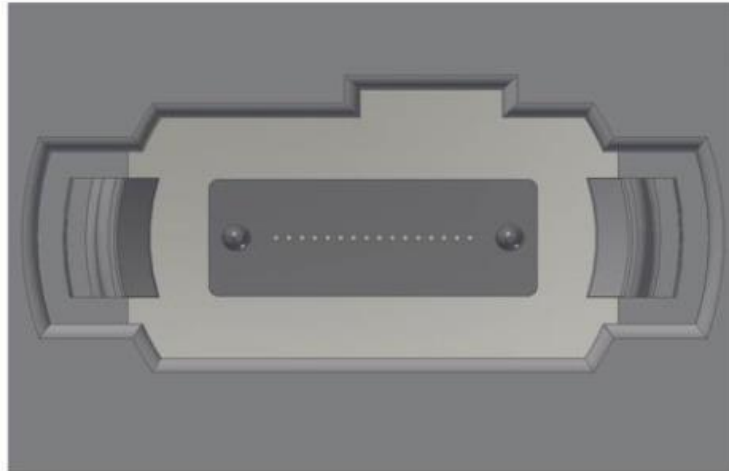

MPO-16 Single Row

Ordering Information

| Part Number | Product Description |
|------------------|--|
| QSFP-DD-400G-SR8 | 400G QSFP-DD, 70m on OM3 Multimode Fiber MMF and 100m on OM4 MMF, MPO16(MTP16) APC connector |

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by OPTONE before they become applicable to any particular order or contract. In accordance with the OPTONE policy of continuous improvement specifications may change without notice.

The publication of information in this data sheet does not imply freedom from patent or other protective rights of OPTONE or others. Further details are available from any OPTONE sales representative.

sales@optone.net
<https://www.optone.net>



Edition JAN 12, 2024
Published by Optone Technology Limited
Copyright © OPTONE
All Rights Reserved